B150(XL)-ODL

HOLIDAY AT HOME

Technische informatie
Technical information
Informations techniques

OUTDOOR LIVING by

BRUSTOR®

www.brustor.com
V2014.01

Doorsnedes
Cross-sections
Sections

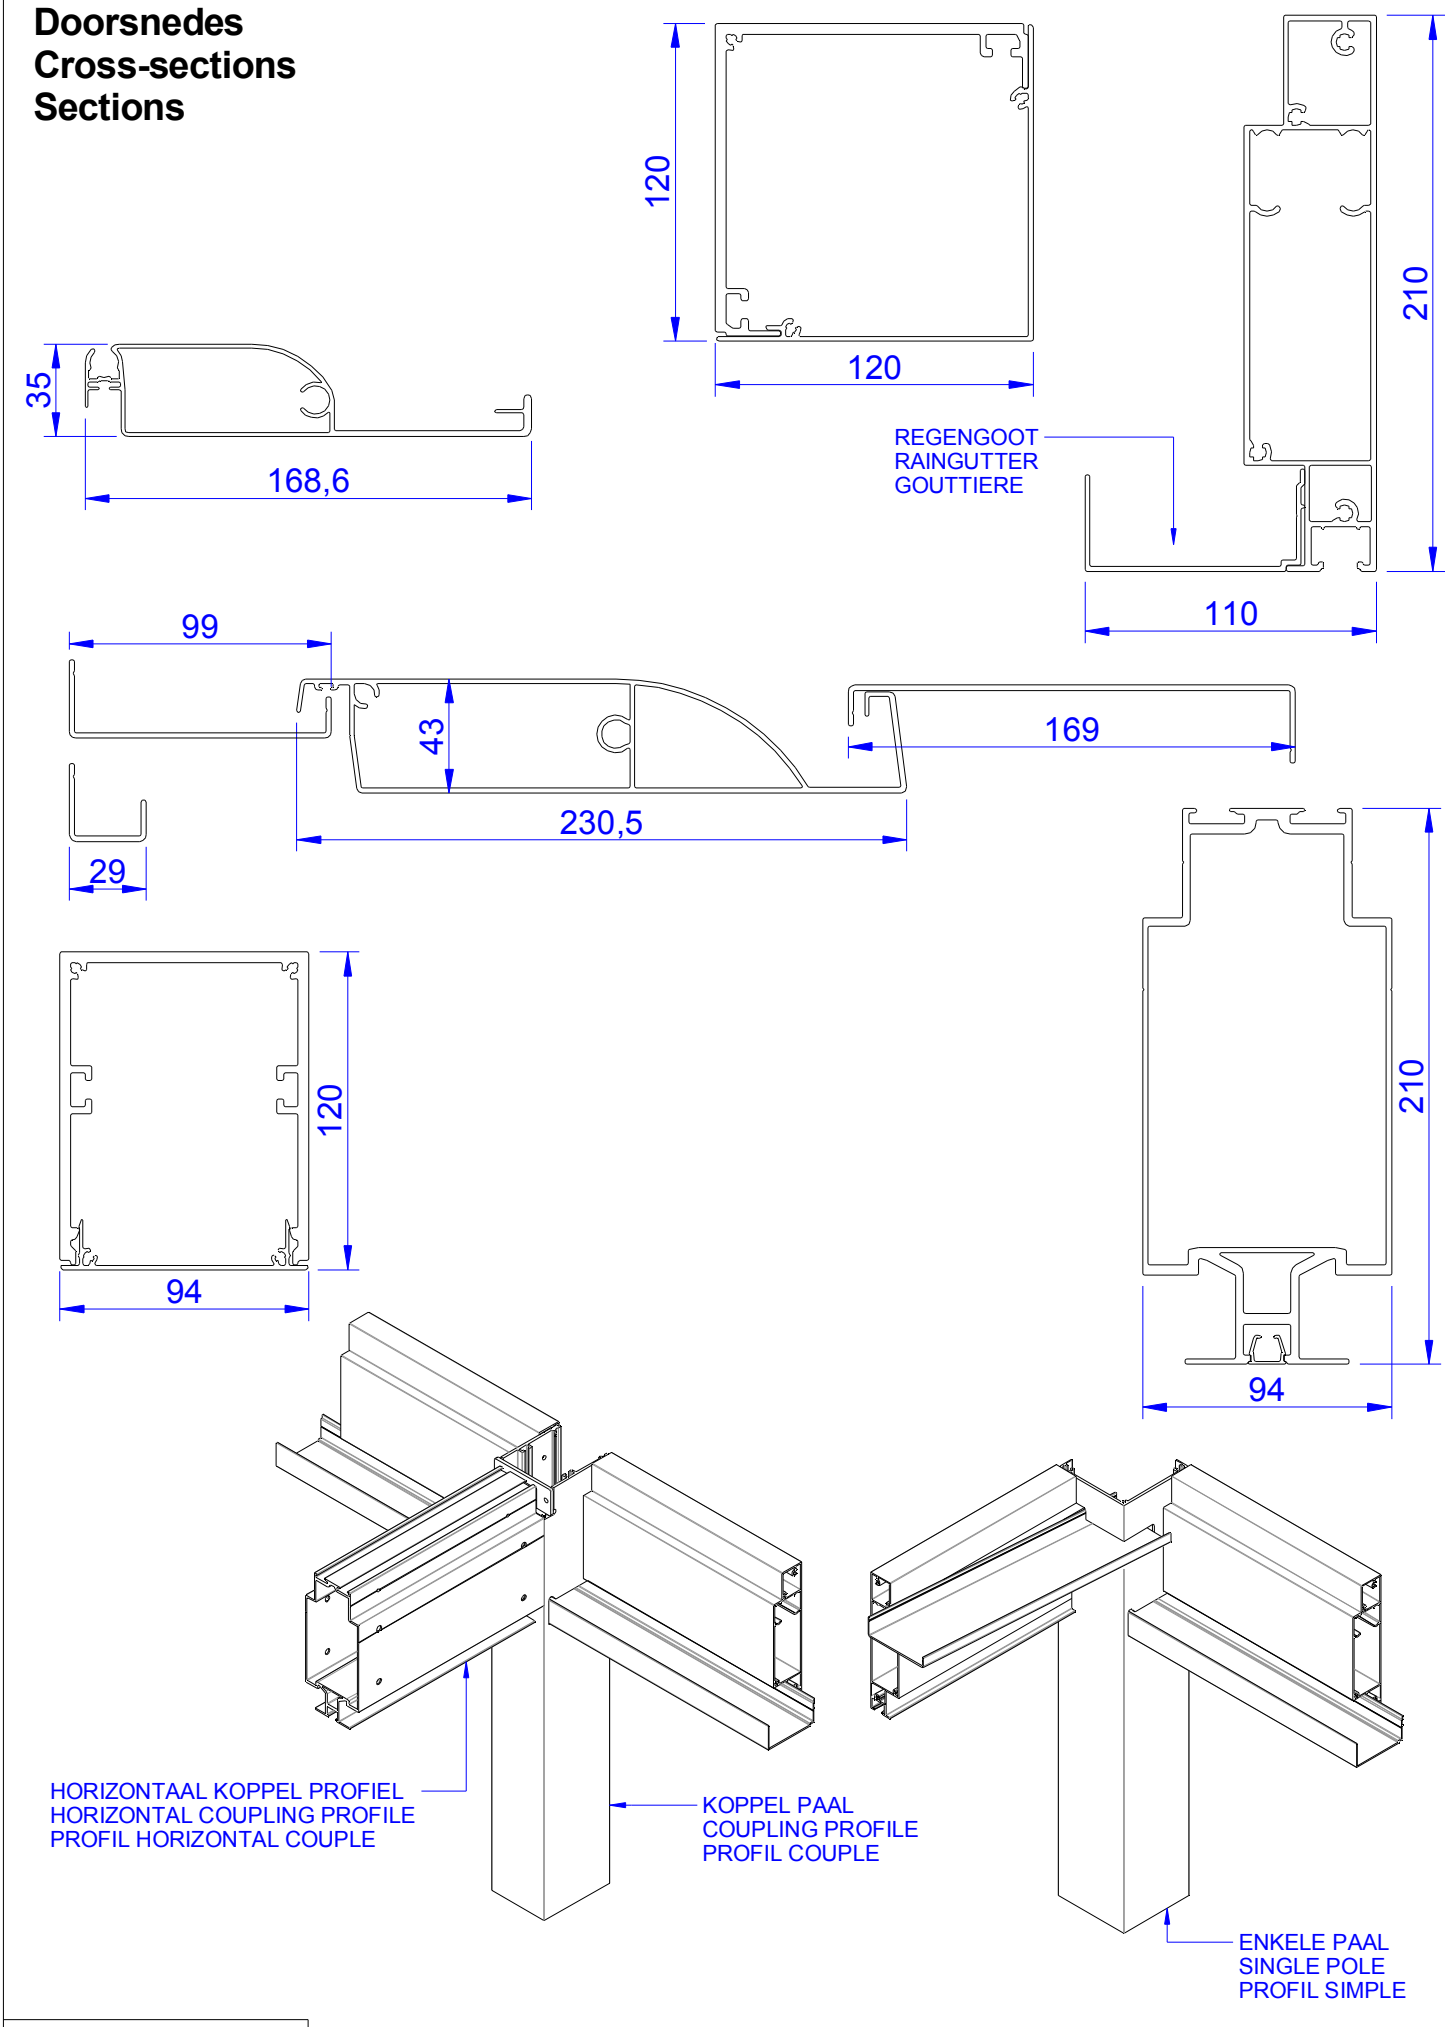

Grondbevestiging
groundfixation
Fixation au sol

Pole support (std)
Support de poteau (std)

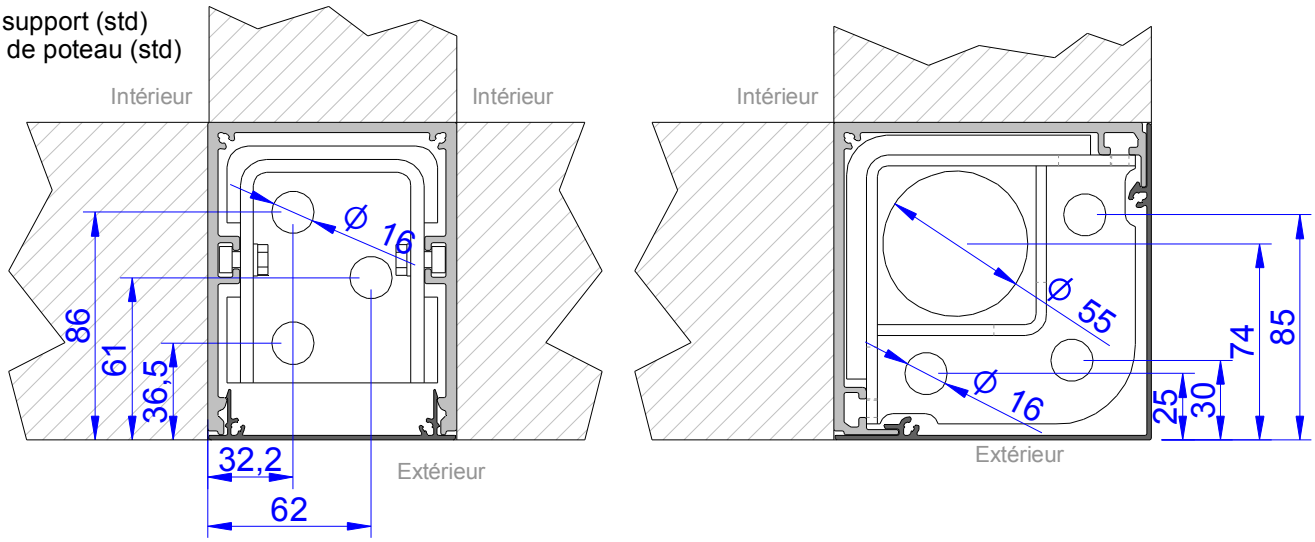

Grondanker
Ground anchor
Pied fixe à enterrer

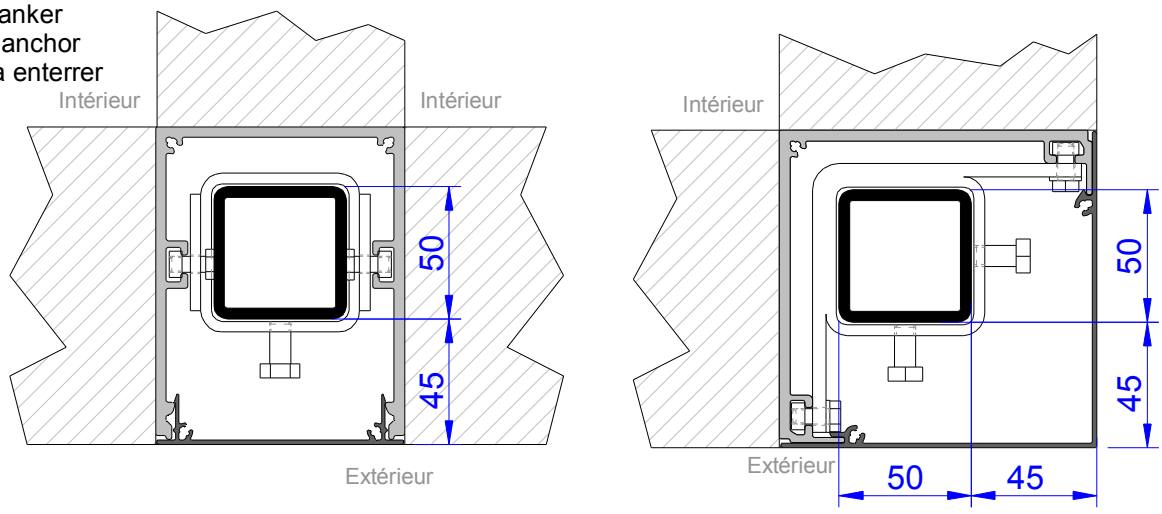

Vloerplaat 20x20cm
Floorplate 20x20cm
Plaque de sol 20x 20cm

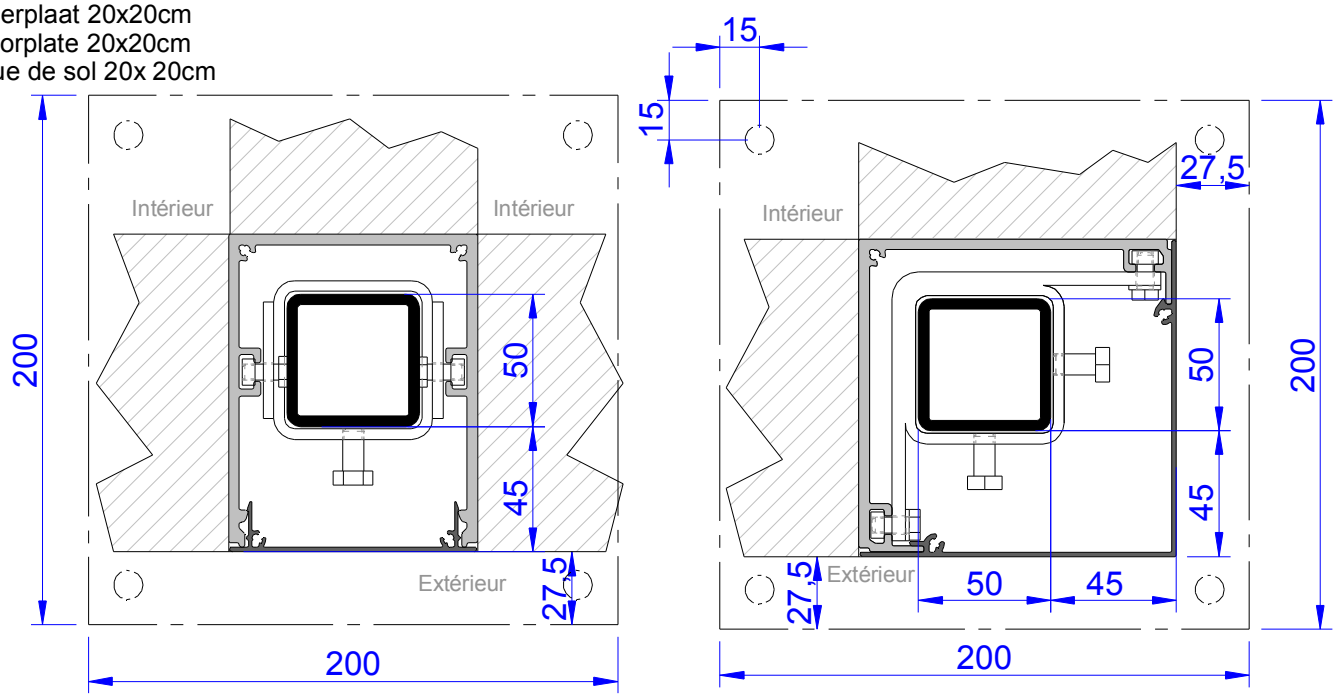

Muurbevestiging
Wall fixation
Fixation murale

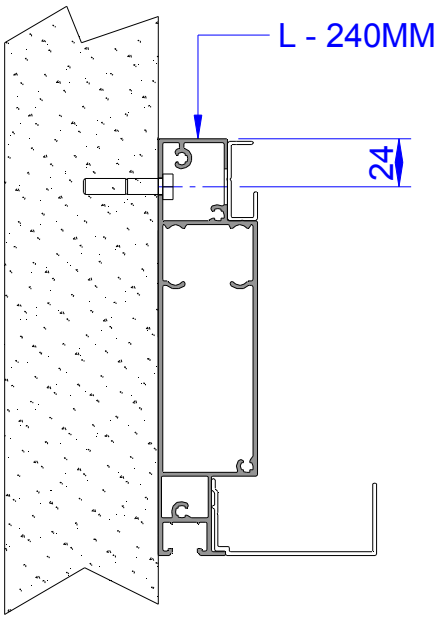

Muurmontage = 3 lange palen
Wall fixation= 3 long poles
Fixation murale = 3 mâts long

TYPE L

1x Afwatering
1x Drainage
1x Évacuation de l' eau

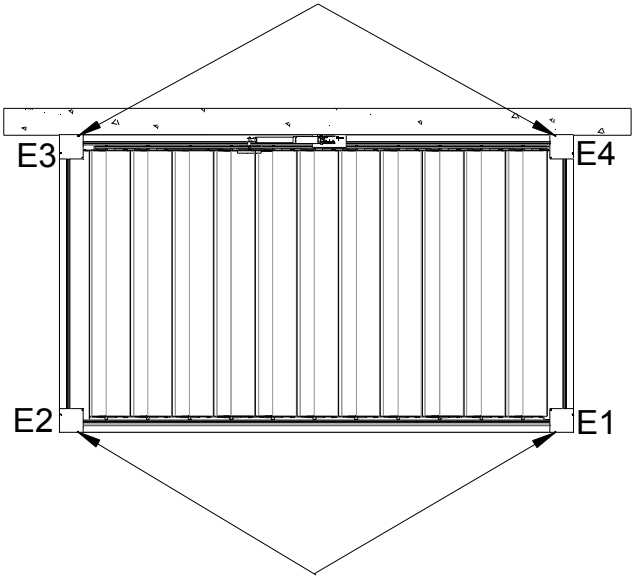

1x Afwatering + 1x Elek. aansluiting
1x Drainage + 1x Elektricity
1x Évacuation de l' eau + 1x Rac. Elek

TYPE W

1x Elek. aansluiting
1x Elektricity
1x Rac. Elek

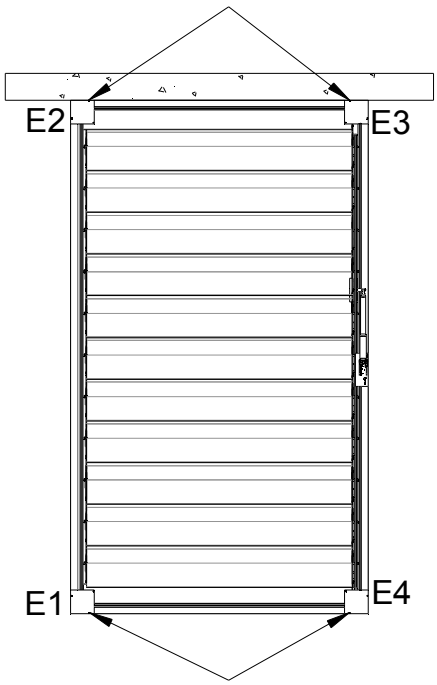

2x Afwatering
2x Drainage
2x Évacuation de l' eau

Hoekstukken
Corner pieces
Pièces cornières

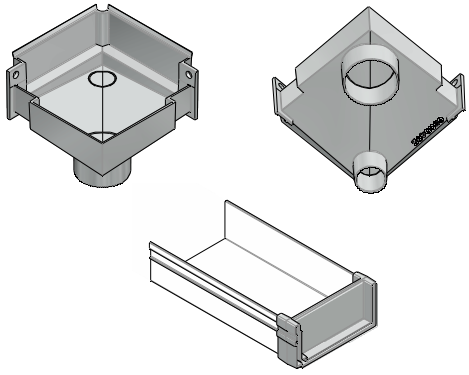

Met afwatering
With drainage
Avec évacuation de l' eau

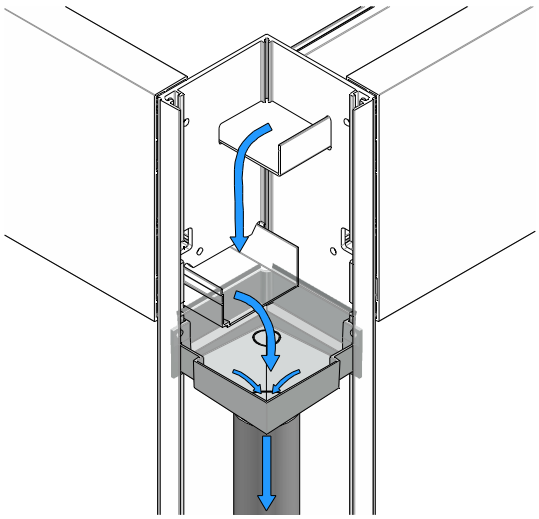

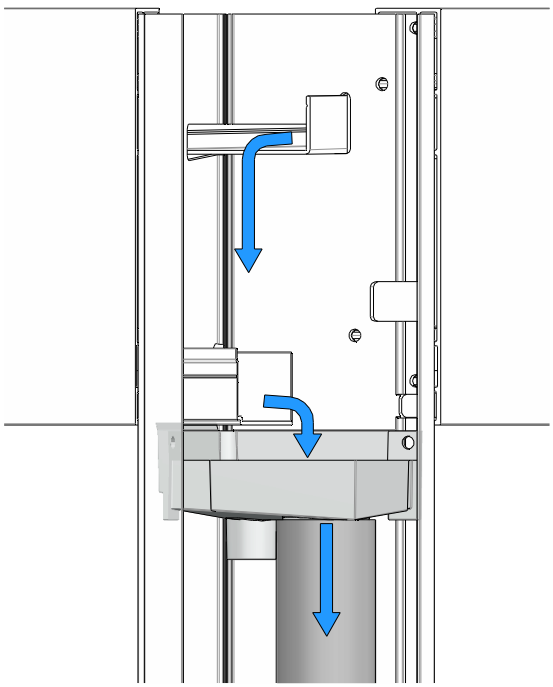

Zonder afwatering / muurmontage
Without drainage / wall fixation
Sans évacuation de l'eau / montage mural

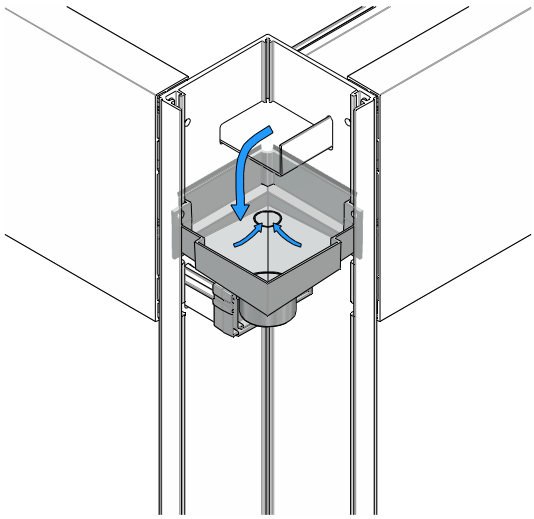

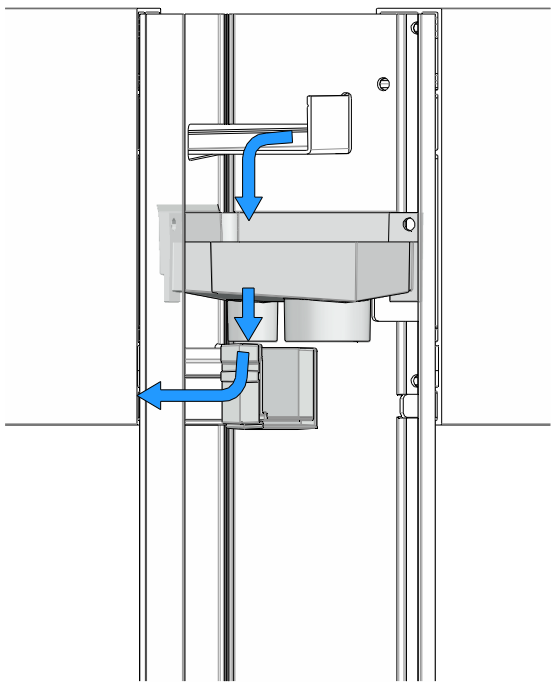

Lamellen open 90°
Louvres open 90°
Lames ouvertes 90°

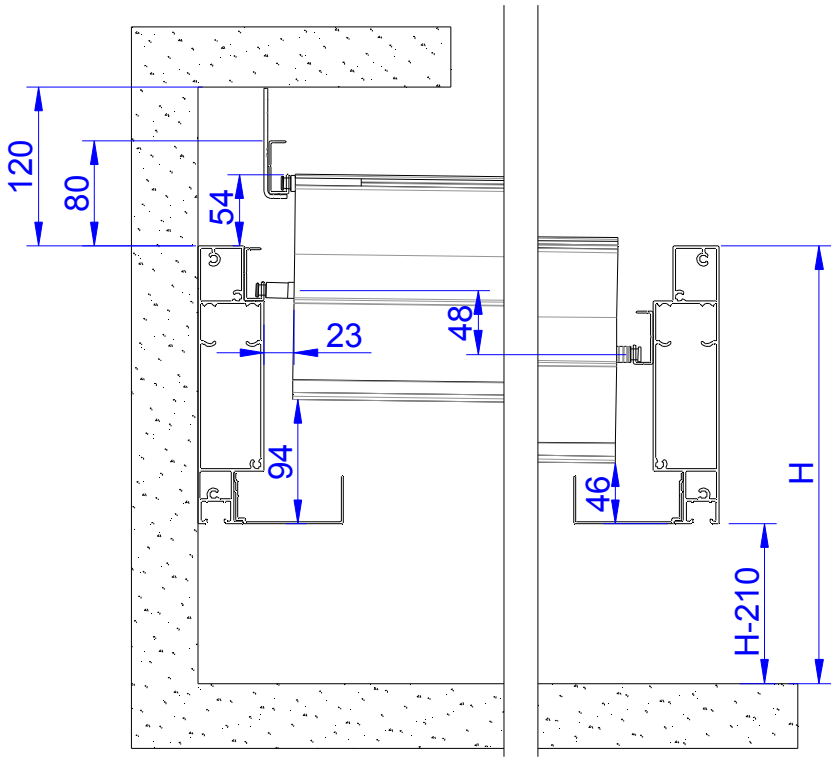

B150

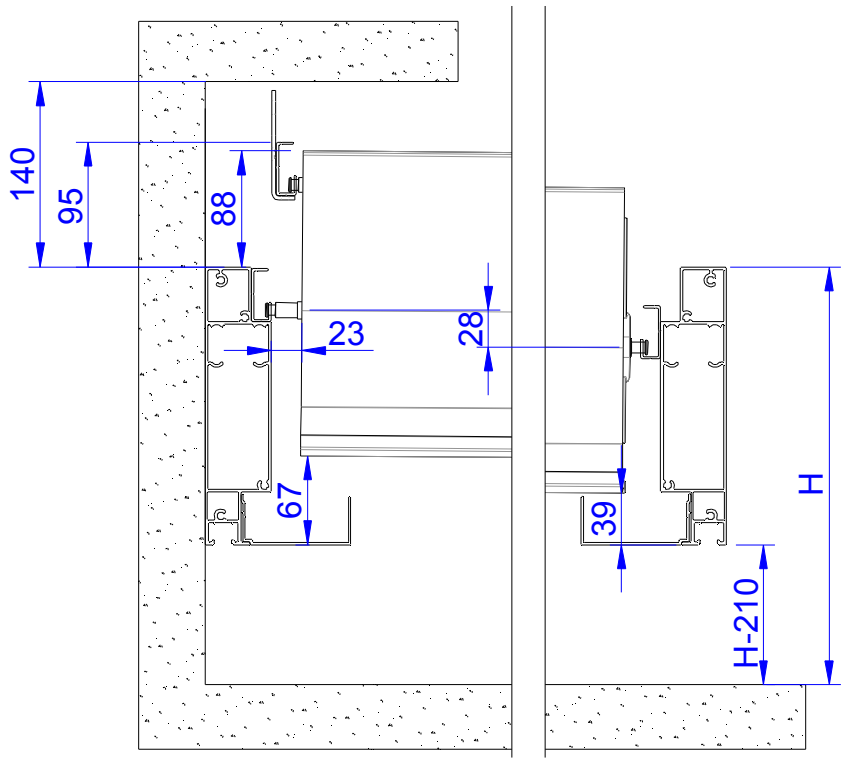

B150XL

Gewicht (kg)
Weight (kg)
Poids (kg)

B \ L	2000	2200	2400	2600	2800	3000	3200	3400	3600	3800	4000
2680	200	220	230	240	250	260	270	280	290	300	310
2840	210	220	230	240	250	270	280	290	300	310	320
3000	220	230	240	250	260	270	290	300	310	320	330
3160	220	240	250	260	270	280	300	310	320	330	340
3320	230	240	260	270	280	290	310	320	330	340	360
3480	240	250	260	280	290	300	310	330	340	350	370
3640	240	260	270	280	300	310	320	340	350	370	380
3800	250	260	280	290	310	320	330	350	360	380	390
3960	260	270	290	300	310	330	340	360	370	390	400
4120	260	280	290	310	320	340	350	370	380	400	410
4280	270	280	300	320	330	350	360	380	390	410	430
4440	280	290	310	320	340	360	370	390	410	420	440
4600	280	300	320	330	350	370	380	400	420	430	450
4760	290	310	320	340	360	370	390	410	430	440	460
4920	290	310	330	350	370	380	400	420	440	460	470
5080	300	320	340	360	370	390	410	430	450	470	490
5240	310	330	350	360	380	400	420	440	460	480	500
5400	310	330	350	370	390	410	430	450	470	490	510
5560	320	340	360	380	400	420	440	460	480	500	520
5720	330	350	370	390	410	430	450	470	490	510	530
5880	330	350	370	400	420	440	460	480	500	520	540
6040	340	360	380	400	430	450	470	490	510	530	560

OL-B150XL = +3kg/m²

Openingsrichting van de lamellen
Opening direction of the louvres
Sens d'ouverture des lames

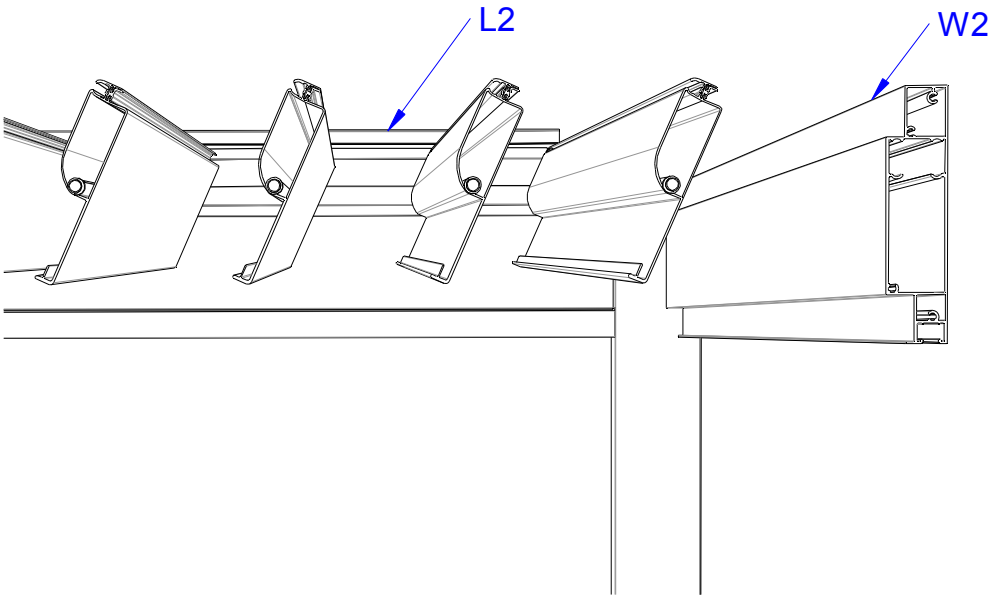

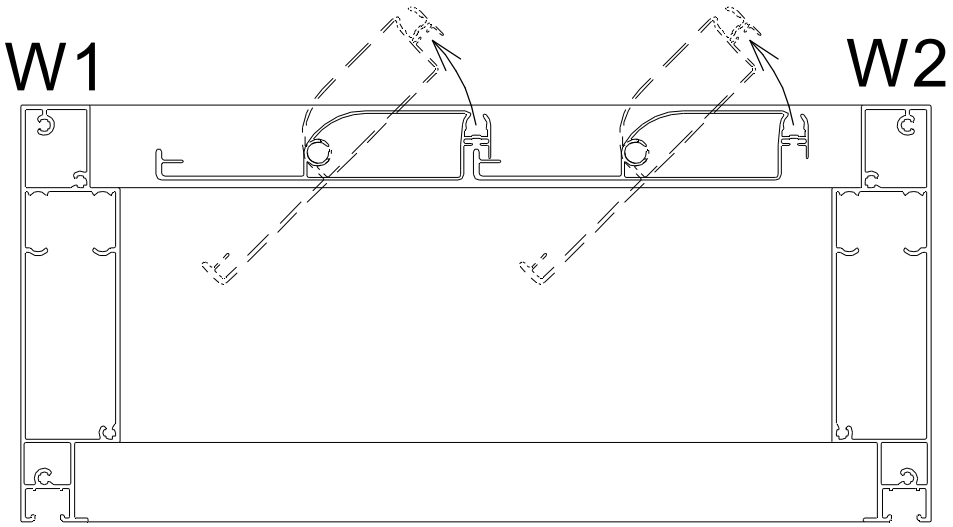

Opvulprofielen
Fixed profiles
Profils de rattrapage / Lames fixes

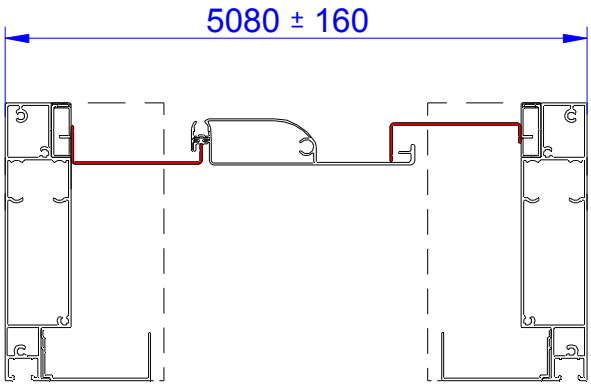

B150

B150XL

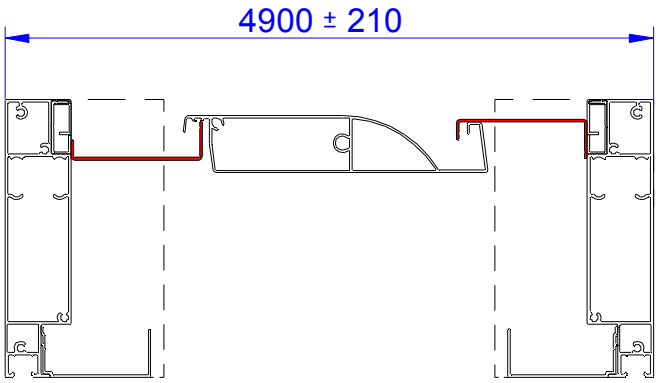

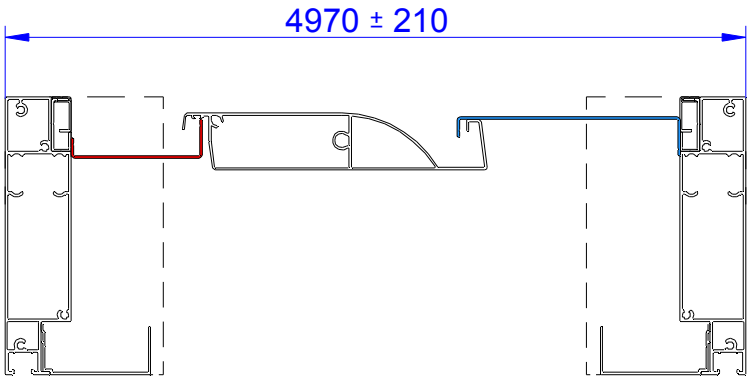

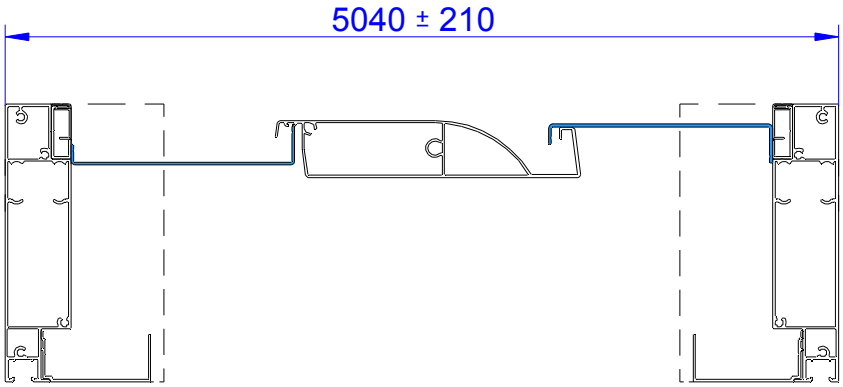

Asjes van de lamellen
Louvre axles
Les axes des lames

	Vlak	LED
0400388		x
0400387	x	
0300188	x	
0400368		x
0300181	x	x

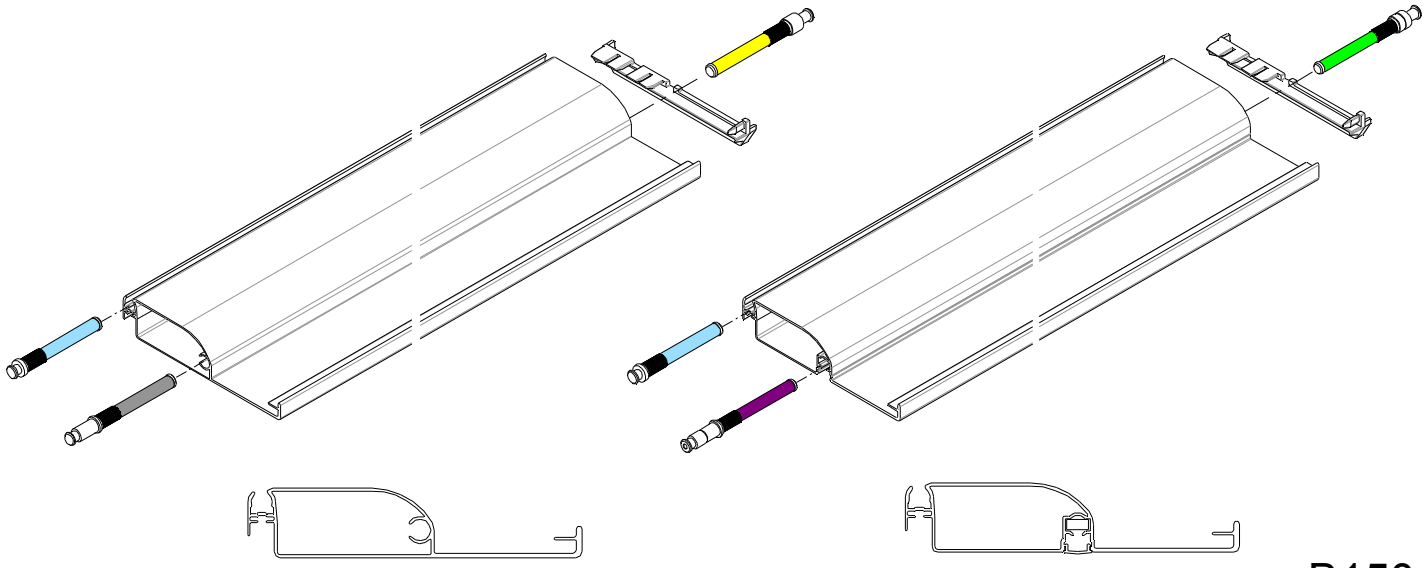

B150

B150XL

	Vlak	LED
0400388		x
0400387	x	
0300188	x	
0400368		x
0300181	x	x
0400386	x	x

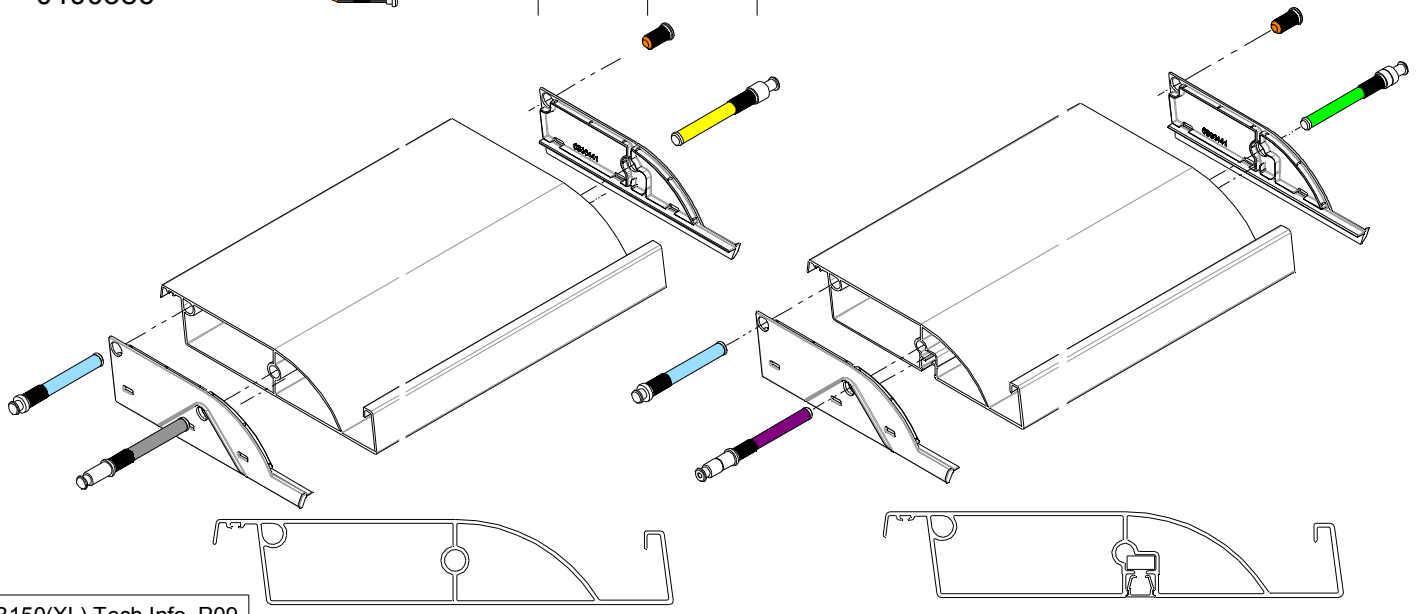

Lamellen
Louvres
lames

OL- B150

SINGLE SIMPLE		KOPPELTYPE W COUPLE TYPE W L+R / G+D		KOPPEL TYPE W COUPLE TYPE W Midden/Milieu	
L	#	L	#	L	#
1560	8	1490	8	1415	8
1720	9	1650	9	1575	9
1880	10	1810	10	1735	10
2040	11	1970	11	1895	11
2200	12	2130	12	2055	12
2360	13	2290	13	2215	13
2520	14	2450	14	2375	14
2680	15	2610	15	2535	15
2840	16	2770	16	2695	16
3000	17	2930	17	2855	17
3160	18	3090	18	3015	18
3320	19	3250	19	3175	19
3480	20	3410	20	3335	20
3640	21	3570	21	3495	21
3800	22	3730	22	3655	22
3960	23	3890	23	3815	23
4120	24	4050	24	3975	24
4280	25	4210	25	4135	25
4440	26	4370	26	4295	26
4600	27	4530	27	4455	27
4760	28	4690	28	4615	28
4920	29	4850	29	4775	29
5080	30	5010	30	4935	30
5240	31	5170	31	5095	31
5400	32	5330	32	5255	32
5560	33	5490	33	5415	33
5720	34	5650	34	5575	34
5880	35	5810	35	5735	35
6040	36	5970	36	5895	36

OL- B150XL

SINGLE SIMPLE		KOPPELTYPE W COUPLE TYPE W L+R / G+D		KOPPEL TYPE W COUPLE TYPE W Midden/Milieu	
L	#	L	#	L	#
1540	6	1470	6	1400	6
1610	6	1540	6	1470	6
1680	6	1610	6	1540	6
1750	7	1680	7	1610	7
1820	7	1750	7	1680	7
1890	7	1820	7	1750	7
1960	8	1890	8	1820	8
2030	8	1960	8	1890	8
2100	8	2030	8	1960	8
2170	9	2100	9	2030	9
2240	9	2170	9	2100	9
2310	9	2240	9	2170	9
2380	10	2310	10	2240	10
2450	10	2380	10	2310	10
2520	10	2450	10	2380	10
2590	11	2520	11	2450	11
2660	11	2590	11	2520	11
2730	11	2660	11	2590	11
2800	12	2730	12	2660	12
2870	12	2800	12	2730	12
2940	12	2870	12	2800	12
3010	13	2940	13	2870	13
3080	13	3010	13	2940	13
3150	13	3080	13	3010	13
3220	14	3150	14	3080	14
3290	14	3220	14	3150	14
3360	14	3290	14	3220	14
3430	15	3360	15	3290	15
3500	15	3430	15	3360	15
3570	15	3500	15	3430	15
3640	16	3570	16	3500	16
3710	16	3640	16	3570	16
3780	16	3710	16	3640	16
3850	17	3780	17	3710	17
3920	17	3850	17	3780	17
3990	17	3920	17	3850	17
4060	18	3990	18	3920	18
4130	18	4060	18	3990	18
4200	18	4130	18	4060	18
4270	19	4200	19	4130	19
4340	19	4270	19	4200	19
4410	19	4340	19	4270	19
4480	20	4410	20	4340	20
4550	20	4480	20	4410	20
4620	20	4550	20	4480	20
4690	21	4620	21	4550	21
4760	21	4690	21	4620	21
4830	21	4760	21	4690	21
4900	22	4830	22	4760	22
4970	22	4900	22	4830	22
5040	22	4970	22	4900	22
5110	23	5040	23	4970	23
5180	23	5110	23	5040	23
5250	23	5180	23	5110	23
5320	24	5250	24	5180	24
5390	24	5320	24	5250	24
5460	24	5390	24	5320	24
5530	25	5460	25	5390	25
5600	25	5530	25	5460	25
5670	25	5600	25	5530	25
5740	26	5670	26	5600	26
5810	26	5740	26	5670	26
5880	26	5810	26	5740	26
5950	27	5880	27	5810	27

B150(XL) + B1100-C

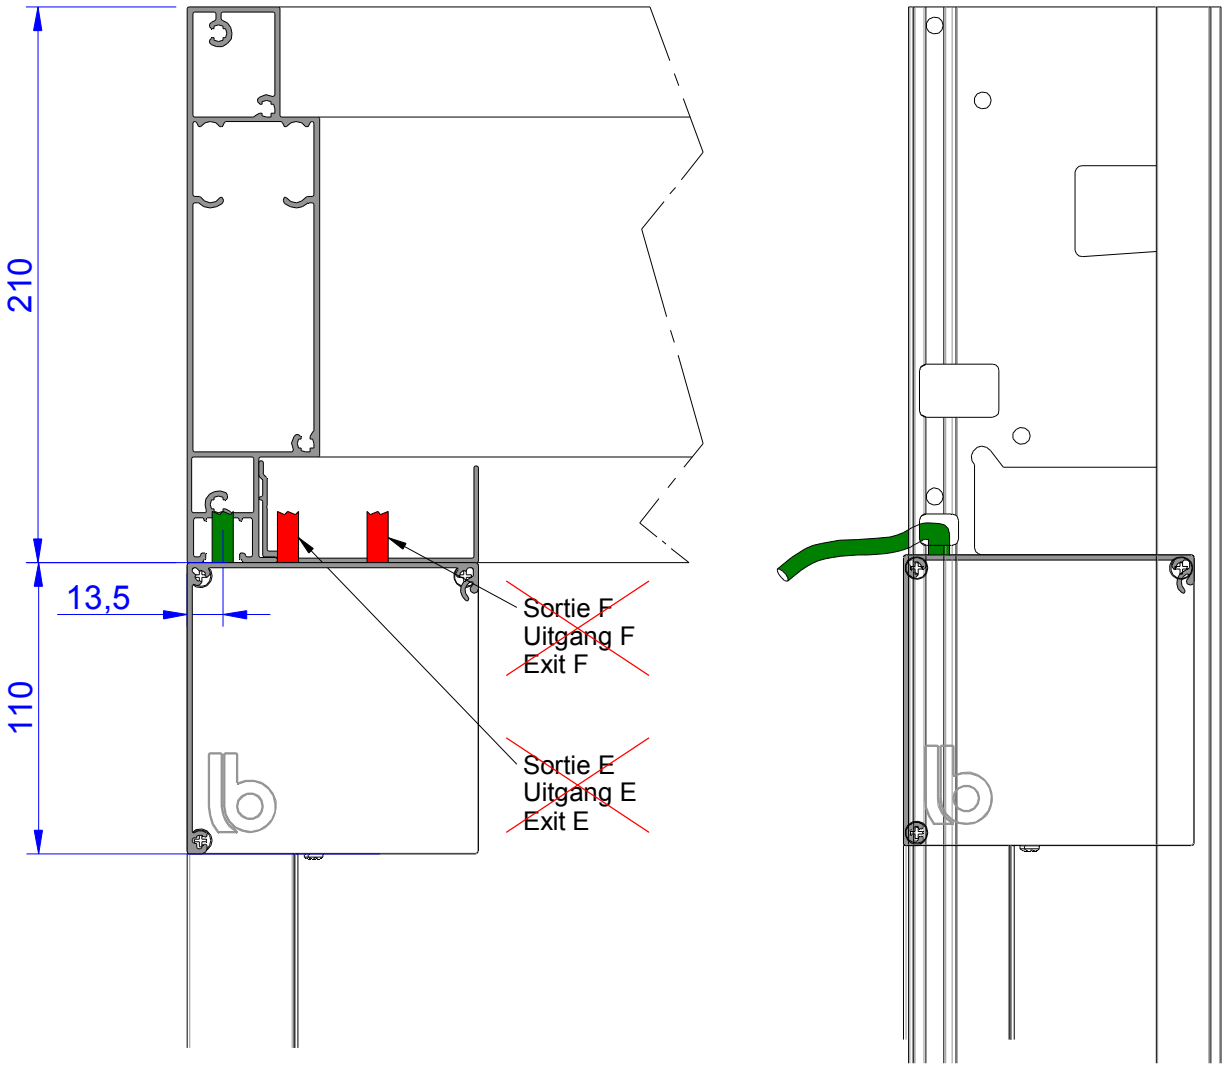

Domoticasysteem
Home automation system
Système domotique

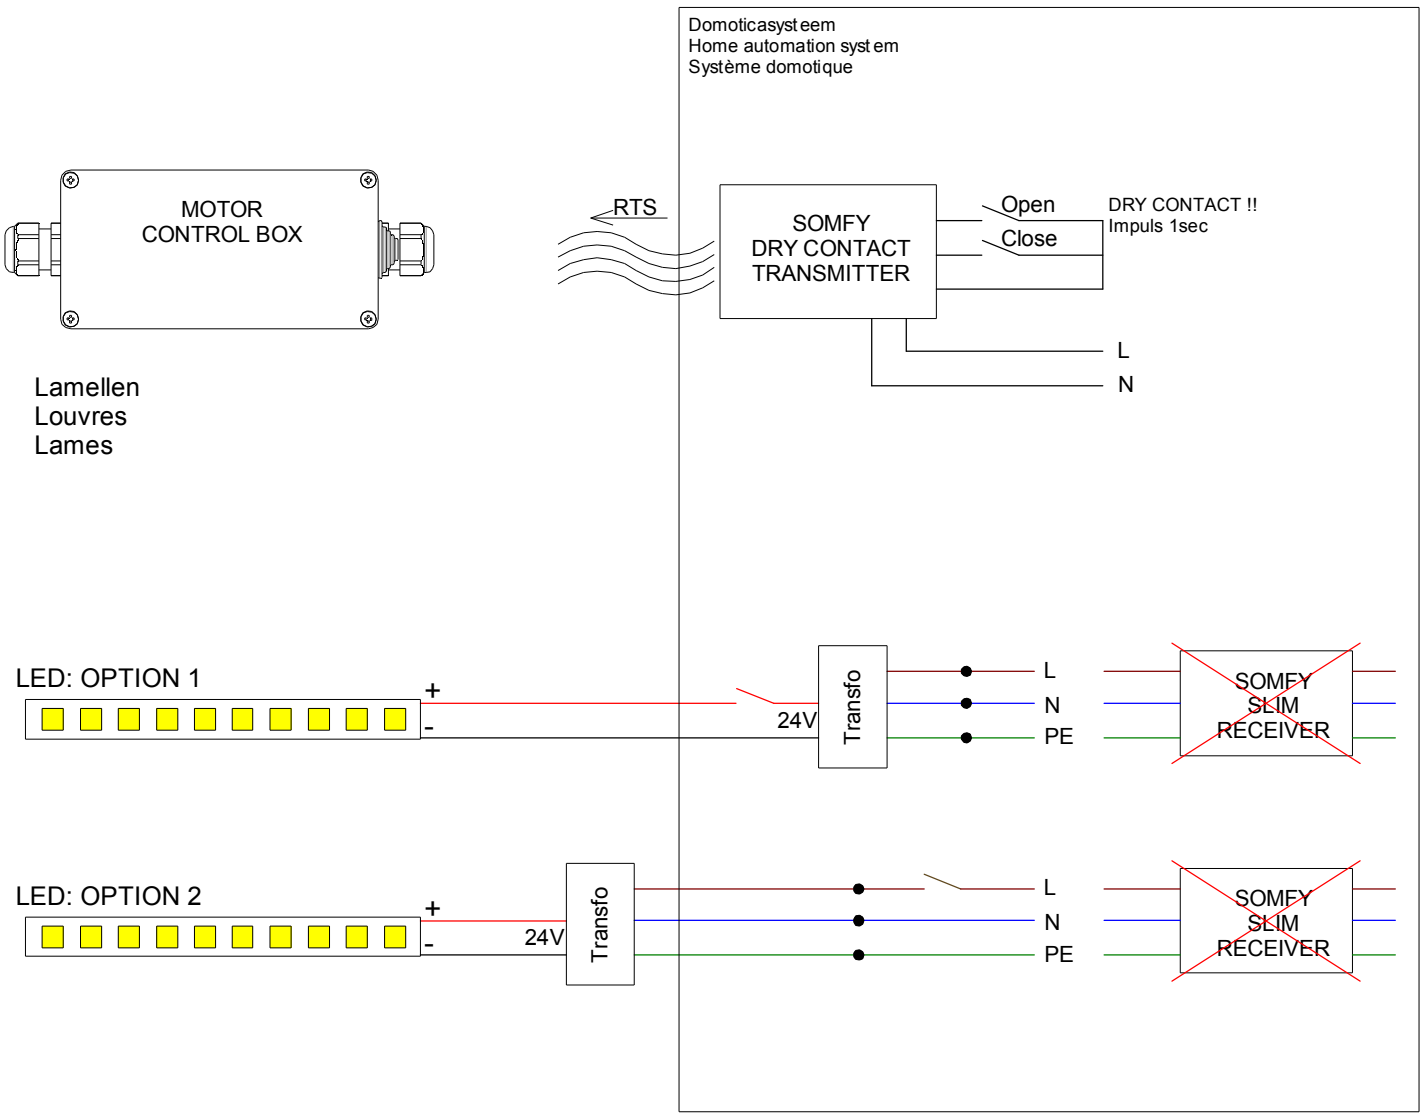

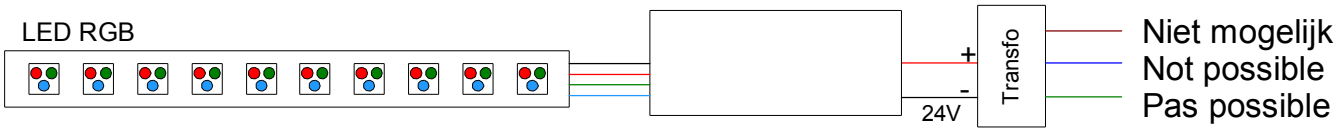

Technische specificaties
Technical specs
Spécifications techniques



Lamellen
Louvres
Lames

- 60 Watt
- 24 V-DC
- 2200 N
- IP66
- 155/185 mm (slag/stroke/course)
- 10m (kabel/cable/câble)



LED (wit)
LED (White)
LED (blanc)

- 5 Watt/m
- 24V-DC
- 3500 K
- 330 l/m
- 10m (kabel/cable/câble)



LED (RGB)
LED (RVB)

- 8 Watt/m
- 24 V-DC
- 10m (kabel/cable/câble)

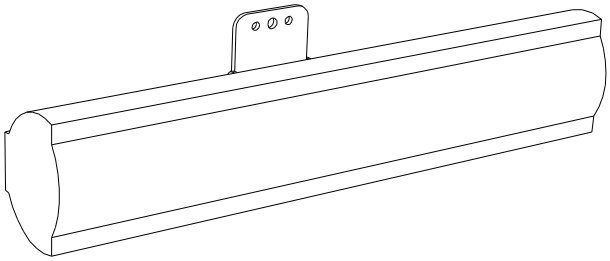

Verwarming
Heater
Chauffage

- 2000 Watt
- 240 V-AC
- IP65
- 3m (kabel/cable/câble)