



BRUSTOR[®] 

OUTDOOR SUN SYSTEMS

sun protection

ENJOY YOUR QUALITY TIME

*Enjoy the
outdoor life again.*

The terrace or garden become more and more often an extension of the house. "Indoor Cocooning" becomes "Outdoor Living". Back to nature with the luxury of indoors. Roof constructions, awnings and vertical blinds are providing optimal sunshine or sufficient shading. During warm days it looks like your home or business is having free air conditioning. This way you are creating your personal quality moments, alone with a glass of fine wine and a good book, a lovely dinner with the family, an enjoyable oasis for your customers or cozy barbecue with friends. This is your moment.






Index

- 4 Seven steps to choose the perfect awning
- 6 Options
- 8 B-24 Prestige and B-25 Prestige
- 10 B-25, B-24 Elite and B-25 Elite
- 12 B-27, B-27 Elite and B-27 Prestige
- 14 B-29
- 15 Twinstor
- 16 B-35 and B-35 Prestige
- 18 B-38 and B-38 Prestige
- 20 B-40
- 21 B-34 and B-34 XL
- 22 B-50
- 24 B-20, B-21 en B-23
- 25 Windblocker
- 26 B-126
- 27 B-127 Veranda
- 28 B-127 Pergola
- 30 ZIPscreen
- 32 Standard screen
- 33 Cablescreen, Indoor screen
- 34 TOPscreen
- 35 B-2100 drop arm awning


Seven steps to choose the perfect awning.

1. Choice of the width

It is recommended to use an awning that is aesthetic and proportional to your façade thus guaranteeing optimum protection to your carpets and furniture.

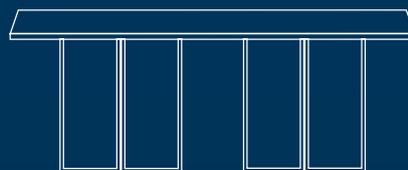



1 scherm

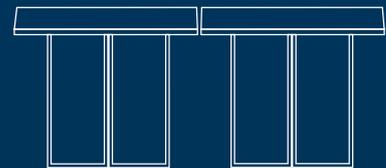

2 schermen

2. Choice of the projection

The shadow under your retractable awning will vary considerably depending on the orientation, the hour of the day, the time of the year and so on... so consider this when you choose your ideal projection.

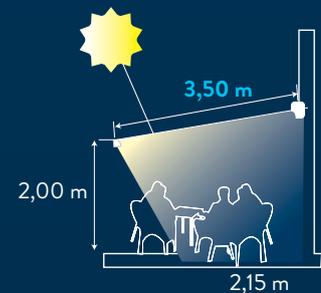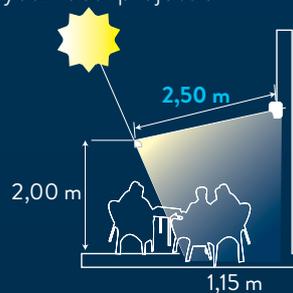

3. Choice of the awning box

The awning box houses the ingenious retractable arms, the motor and the fabric. Besides a beautiful design, the intended application, the robustness and the way of fixation, are important elements in the choice of an awning box.



a. Open system without protective cover



a. Open system with protective cover



b. Fully closed box: cassette screen



b. Fully closed box: 2-tubes system / fixed supports



b. Fully closed box: 3-tubes system / flexible

4. Choice of retractable arms

No parts are as important as the folding arms. They support the fabric, they roll it in and out and are even hosting LED lights. Wind, large projection: each application has its specific retractable arm.



CABLE CHOICE	2 CABLES	4 CABLES	4 CABLES PRESTIGE
Maximum load	100 kg casted alu parts	105 kg casted alu parts	130 kg drop forged alu parts
Height of the arm	66 mm	71 mm	73 mm
Thickness of profile	2,5 mm	2,5 mm	3 mm
LED lighting	exterior	integrated	integrated
WIND CLASS (European standard EN 13561)	2	2	3
Wind force (Beaufort)	5	5	6
Wind speed (km/h)	till 39	till 39	39 to 49

5. Choice of fabric

It is recommended to choose a high quality acrylic fabric that can resist all weather conditions. The fabric is the largest surface of the canopy and gives an extra touch to the surroundings. The fabric comes in many colours and textures making the design as important as the practical function of the awning. Enjoy our extensive collection of more than 500 references.




6. Choice of motorisation

The awnings are fitted with a fully automatic controlled motor operated by a convenient remote allowing at the same time other functions like controlling a valance, switching on and off the LED lighting or heating. Simpler, but less flexible, is the operation with a switch. Or in case you'd really want to go back to basics, you could opt for a manual crank.



Motor with
switch



Motor with remote
control

7. Choice of finish

Brustor is offering a number of options to personalise your awning. LED lighting, heating, special colours ... These options are on the following pages.

Add value to the awning thanks to the many options

1. LED lighting

Brustor offers various ambience lighting systems that are perfectly stylishly integrated into the awning.



a. under the box



b. in the elbow



c. in the upper- and lower arm


2. Heating

When temperature drops, a pleasant radiant heat can bring comfort. A 2000W heating element makes it appealing to enjoy outdoor life again until even long after the warm summer days.



5. Lead rail support *(Depending on the type of awning)*

Where the awning is rolled out and the front profile has reached its furthest position, there is also the point where the awning faces the downward pulling force the most. In order to compensate for this and to give the awning stability and resistance, 2 integrated support legs can optionally be mounted.

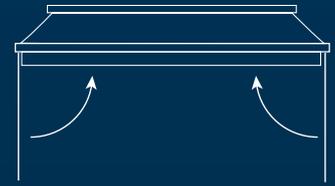


3. Remote control

Each awning is equipped with a motor that controls the respective parts. This motor can be optionally driven by means of an RTS transmitter with one or more channels. This remote control is included for some awnings.

6. Ceiling fix brackets

Sometimes it is necessary to mount the awning to the ceiling. Special ceiling fix brackets bring the desired solution.

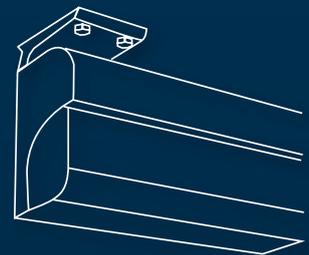

4. Valance

Sometimes the projection is insufficient to create the desired shadow. An extra valance on the front increases the shadow surface extensively.



7. Wide choice of colors

The awnings are usually available in a range of standard colors. Brustor offers its customers additional choice between all RAL colors.



Your ease of use at a glance



5 YEAR GUARANTEE

All Brustor products are thoroughly tested to the highest quality standards. Our installers are highly qualified professionals who undergo continuous product training. They are responsible for a perfect installation and excellent after sales service. Thanks to this approach all Brustor products are guaranteed for a period of 5 years. On request the terms of the guarantee can be obtained from your local dealer.

10 years of guarantee on all retractable arms



CE CERTIFICATE

All Brustor products are tested and approved to the strictest European quality and safety standards.



BRUSTOR®

B-24 & 25 PRESTIGE

The heavy duty awning



Wind class 3 Prestige arm



Included as standard



integrated LED in the elbow (optional)



B-24

B-25



WIND CLASS 3: UP TO WIND FORCE 6

The B-25 Prestige is the top class awning in the B-25 series. The awning is equipped with wind class 3 arms (**up to 6 Beaufort**). The B-24 is a variant with its entire new design. These 73 mm new arms with **quadruple cables** are approved to the highest European standards (EN 13561). The standard **remote control** operation allows an easy and reliable functioning.

On cooler evenings, the **LED lighting** integrated in the elbow and the **dimnable electric heating** are an interesting option. The B-24 Prestige and B-25 Prestige is available as standard up to a width of 14m and a projection of 3 m, 3,5 m or 3,75 m. **All RAL colours** are standard and there is a choice between hundreds of high quality acrylic fabrics.

Standard:



wind class



remote control

Option:



LED



heating



lead rail




valance

STANDARD COLOURS All RAL colours are standard.

B-24



B-25



DIMENSIONS

Width	min. 3,53 m - max. 14,00 m (coupled from 7 m)
Projection	3,00 m - 3,50 m - 3,75 m
Operation	Somfy RTS motor with remote control
Cassette	22,0 cm high x 14,7 cm deep

Dimmable terrace heating (optional)



B-25 & B-24 ELITE/25 ELITE

Solid elegance for every façade

SOLID AND ELEGANT AT THE SAME TIME

The B-25, B-24 Elite and B-25 Elite are ideal **for big projections**. The B-24/25 Elite is equipped with **71 mm high arms with quadruple cables** which give even greater fabric tension and a maximum projection of 3,75 m. The B-25 has strong arms with 2 cables for a projection up to 3 m. Aluminium welded side plates and a completely closed cassette give the awning an **elegant finishing touch**. They also guarantee a better protection in unfavorable atmospheric conditions. Both are available with a width up to 14 m (coupled) or 7 m (single).

Optional remote controlled **LED lights** can be added on the arm elbows of the awning. Here as well, you can choose between **5 standard colours, 200 optional RAL variations** and hundreds of high quality acrylic fabrics. The many options complete these solid awnings to perfection. In short, thanks to their **compact dimensions**, the B-25 and B-24/25 Elite fit like a glove on every façade.

Option:



remote control



LED



RAL



lead rail



valance



heating

STANDARD COLOURS



Brustor White



R 8019 Brown



R 9001 Cream



Anodised



R 7016
Anthracite grey
(textured)

Other RAL colours in option.



B-24 Elite




B-25



B-25 Elite

DIMENSIONS

	B-24 Elite/B-25 Elite	B-25
Width	min. 2,05 m - max. 14,00 m (coupled from 7,00 m)	min. 2,05 m - max. 14,00 m (coupled from 7,00 m)
Projection	1,50 m - 2,00 m - 2,50 m - 3,00 m - 3,50 m - 3,75 m	1,50 m - 2,00 m - 2,50 m - 3,00 m
Operation	Somfy motor (gear optional)	Somfy motor (gear optional)
Cassette	22,00 cm high x 14,7 cm deep	19,7 cm high x 14,0 cm deep

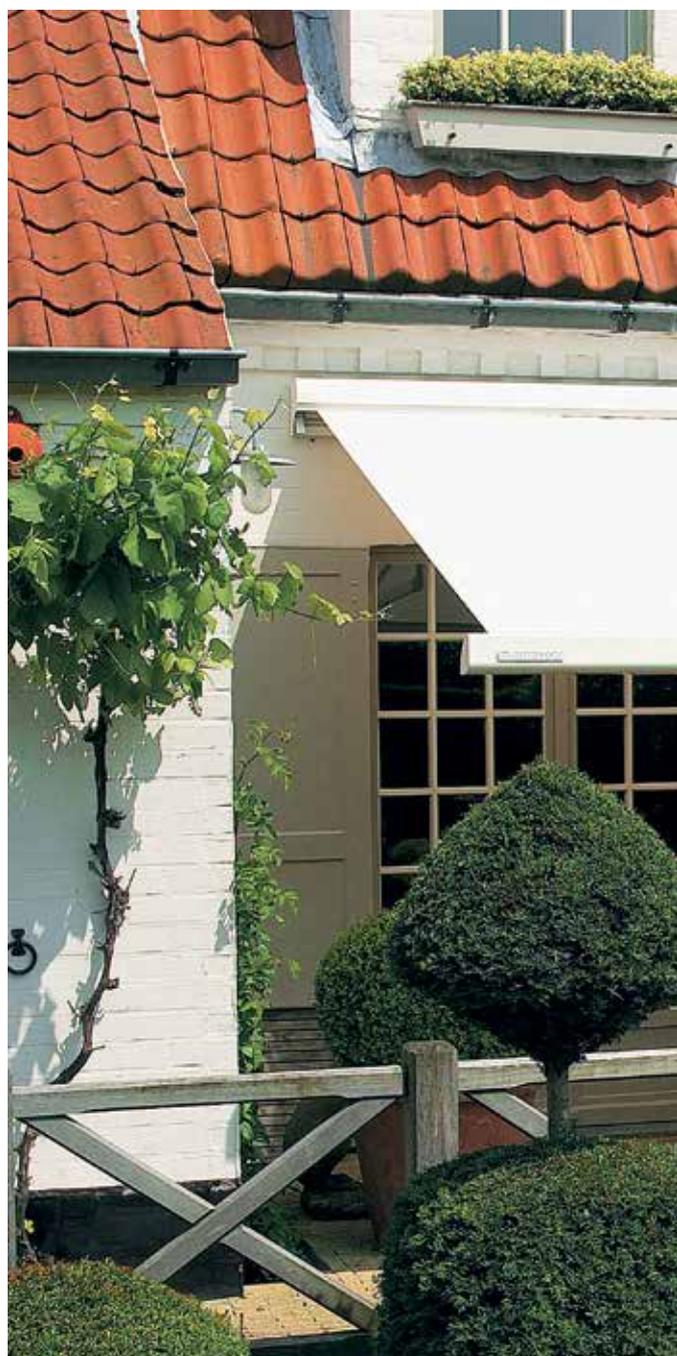

B-25 / B-24 Elite: 4 cables

B-25: 2 cables





B-24 E

BRUSTOR

B-25

BRUSTOR



Lead rail support (optional)



LED lighting in both arms (ELITE)



From 7 m: coupling the 2 main covers with an intermediate roll

B-27, B-27 ELITE AND B-27 PRESTIGE

The architect's practical solution

THE ARCHITECT'S PRACTICAL SOLUTION

Retractable awnings B-27 in Prestige, Elite and standard version distinguish with their **contemporary rectangular shape**. All three models are appropriate for modern houses and can also be built into the façade. They're technically identical to the B-25 models in Prestige, Elite and standard version.

The standard colour of these cassette awnings is **white**, while **200 other RAL colours** are available as an option.

Option:



Remote control
standard for Prestige



LED



RAL



lead rail



valance



heating

STANDARD COLOURS



Brustor White



R 8019 Brown



R 9001 Cream




Anodised




R 7016
Anthracite grey
(textured)

Other RAL colours in option. Prestige: every RAL colours are standard.



B-27



B-27 Elite / Prestige

DIMENSIONS

	B-27 Prestige	B-27 Elite	B-27
Width	3,53 - 14,00 m	2,05 - 14,00 m (coupled from 7,00 m)	2,05 - 14,00 m
Projection	3,00 - 3,75 m	1,50 - 3,75 m	1,50 - 3,00 m
Operation	motor with remote control	motor (gear optional)	motor (gear optional)
Cassette	22,0 cm high x 14,7 cm deep	22,0 cm high x 14,7 cm deep	19,7 cm high x 14,0 cm deep
Wind class	3	2	2



Valance optional



LED strip under the box (optional)



DOUBLE PITCH


The awning B-29 with **double pitch arms** has been designed to overcome low mounting heights directly **above outward opening doors** that would damage the fabric with a regular awning. This awning with an **extra pitch of 8°** is also an ideal solution for balconies or when the sun is low. The **full cassette casing** made of corrosion resistant aluminum protects the fabric, components and operating mechanism from all types of inclement weather. B-29 is available with a **projection of 2,5 m or 3,0 m** and up to a maximum width of 6 m. A **dimmable electrical heater** and **LED lights** integrated in the elbow of the arms are available as options which enable you to enjoy longer evenings outdoors.

STANDARD COLOURS



White

Other colours optional.



DIMENSIONS

Width	min. 3,05 m - max. 6,00 m
Projection	2,50 m - 3,00 m
Operation	motor (gear optional)
Cassette	20,0 cm high x 14,5 cm deep

Option:



RAL



LED



heating



valance



remote control



Double pitch thanks to the ingenious arm

TWINSTOR

The eye-catcher on every terrace



Beside ground anchors, the Twinstor can as an alternative be fixed in flowerboxes with reinforcement profiles.

THE EYE-CATCHER ON EVERY TERRACE

The Brustor Twinstor creates shadow wherever you prefer: with **two ground anchors or freestanding galvanised steel flowerboxes**, this **autonomous awning** is anchored in the garden or on the terrace without attachment to an existing wall or porch. The fabric and the mechanical parts are protected in an optimal way thanks to the two **fully enclosed cassette** casings, guaranteeing a longer life.

The arms are **electrically controlled with a waterproof key switch** or optional remote control. **LED lights** and a **patio heater** operated by remote control are very convenient when you want to enjoy your Twinstor on cooler, darker evenings. With a maximum width of 7 m and a projection of 3 m off each side, a **shadow surface of 42 m²** is created. The Twinstor Elite comes with **71 mm high arms and 4 cables**, causing an even better fabric tension.

Option:



LED



heating



RAL



valance



remote control

STANDARD COLOURS



White



Brown



Anodised



R 7016
Anthracite grey
(textured)




Cream



Other colours optional

Frame:
RAL 9007 textured.



DIMENSIONS

Width	2,05 m - 7,00 m (frame)
Max. width	up to 7 m
Projection	2 x 2,0 m or 2 x 2,5 m or 2 x 3,0 m
Height	2,7 m (optional up to 3,0 m)
Operation	motor with waterproof key switch

B-35 EN B-35 PRESTIGE

Wide, yet wind resistant

WIND CLASS 3 RESISTANCE UP TO 4 M PROJECTION

Retractable awning B-35 Prestige has been developed around a rectangular **torsion bar** of 50 mm x 30 mm and uses heavy duty arms with a height of 73 mm and quadruple cables. The Brustor B-35 Prestige arms are CE approved for wind class 3 following the European standard EN 13561 and ensure a perfect functioning of the awning, even at a **wind force of 6 Beaufort** and a projection of 4 m. As an option, this awning can be equipped with a **fully enclosed cassette** system, remote controlled **built-in LED lights** and **heating** for the longer evenings. As an alternative for the **5 standard colours**, you can choose from **200 optional RAL variations** and some hundreds of different high quality acrylic fabrics.

B-35 is a variant with a **wind resistance up to 5 Beaufort** (wind class 2). The motor has **remote control** as an option, as well as **LED lights** mounted on the arm elbows.

Option:



Remote control
standard for Prestige



LED



RAL



lead rail



valance



heating

STANDARD COLOURS



Brustor White



R 8019 Brown



R 9001 Cream



Anodised





R 7016
Anthracite grey
(textured)

(*) Not possible for B35 type A & B. Other colours optional.

DIMENSIONS



	B-35	B-35 Prestige
Width	2,05 m - 15 m (from 7,5 m)	3,50 m - 15 m (from 7,5 m)
Projection	1,50 m - 2,00 m - 2,50 m - 3,00 m - 3,50 m - 4,00 m	3,00 m - 3,50 m - 4 m
Operation	motor (gear optional)	motor with remote control
Cassette	20,0 cm high x 18,2 cm deep	20,0 cm high x 18,2 cm deep
Wind class	2	3



B-35 Prestige: 4 cables

B-35: 4 cables





Awning B-35 is available in several versions, varying from an open system (type A) to a fully enclosed cassette casing (type K).
 Awning B-35 Prestige is available with fully enclosed cassette (type K) or half-closed (type I). Profile G can be combined with all versions.



B-35 LED strip in both arms



Screens larger than 7,5 m come standard with an intermediate roll, but up to 15 m they can also be delivered as 1 piece.

BRUSTOR®

B-38 AND B-38 PRESTIGE

For maximum shadow




The awning can be operated via remote control



The valance of the B-38 (Prestige) disappears completely into the lead rail...

... or provides extra shadow and privacy.



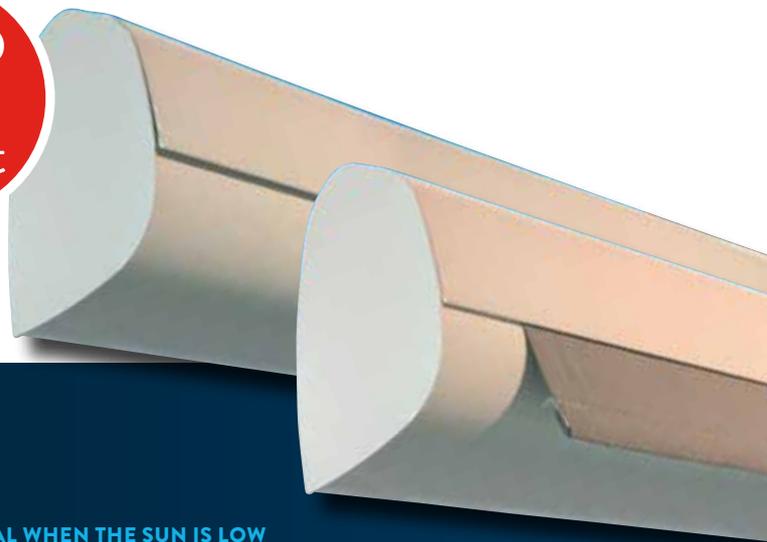

IDEAL WHEN THE SUN IS LOW

The B-38 Prestige is a **wind class 3 folding arm awning** with a **variable valance that can disappear completely** into the lead rail. This valance has a **drop up to 1,3 m** therefore offering extra privacy and perfect protection from the low sun. The awning and variable valance can be controlled with one single **remote control**. In option, this remote can also control the built-in **LED lights** and **electric heater**. The B-38 Prestige is available with a width up to 6m with a maximum projection of 3 or 3,5 m.

The B-38 is a variant with a **projection of 1,50 to 3,50 m** and will withstand **wind speeds up to Beaufort scale 5** (wind class 2). The **remote control** is an option, just as the **LED lighting in the elbow**.

Option:



remote control
standard for Prestige




LED



heating



RAL



STANDARD COLOURS



Brustor White



R 8019 Brown



R 9001 Cream



Anodised



R 7016
Anthracite grey
(textured)

Other colours optional


DIMENSIONS

	B-38	B-38 Prestige
Width	2,05 m - 6,00 m	3,50 m - 6,00 m
Projection	1,50 m - 2,00 m - 2,50 m - 3,00 m - 3,50 m	3,00 m - 3,50 m
Operation	motor with wall switch	motor with remote control
Cassette	20,2 cm high x 21,2 cm deep	20,0 cm high x 18,2 cm deep
Valance	variable, up to 1,30 m	variable, up to 1,30 m
Wind class	2	3



B-38 Prestige: 4 cables

B-38: 4 cables

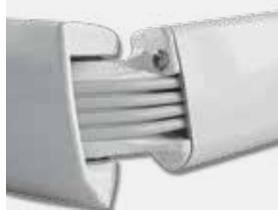

B-40

The company awning



A ROUND DESIGN

The awning B-40 is extremely suitable for the **project market**. Based upon the B-35 family, this awning has a **round design**.

Two types are available: it can be mounted direct to the wall (type I) or with the help of special supports +/- 10 cm from the wall (type K).



STANDARD COLOURS


 Anodised
 Other colours optional

DIMENSIONS

Width	min. 2,05 m - max. 7,00 m
Projection	1,50 m - 2,00 m - 2,50 m - 3,00 m - 3,50 m
Operation	motor
Cassette	25,5 cm high x 25,5 cm deep

B-34 AND B-34 XL

Limited width, large projection

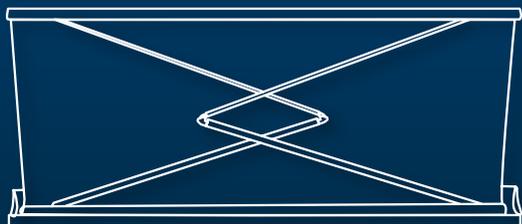

The B-34 XL makes it possible to have a large projection, even when the width is limited.


BUDGET FRIENDLY

The B-34 is a **budget friendly awning** with a **maximum width of 6 m** and projection of 3 m. The integrated tubular **motor is standard**, but it can be equipped with gear operation as an option.

STANDARD COLOURS

-  White
- Other colours optional

DIMENSIONS

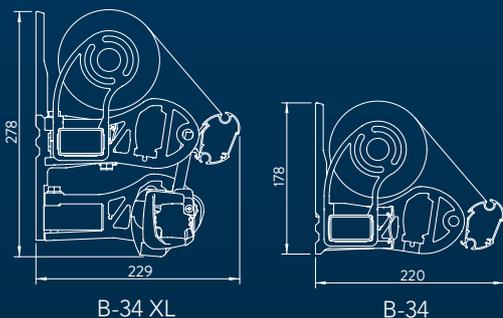

B-34 XL

B-34

Width	min. 1,25 m, with crossed arms – max. 6,00 m
Projection	1,50 m - 2,00 m - 2,50 m - 3,00 m
Operation	motor (gear optional)
Cassette	19,3 cm high x 23,4 cm deep

B-50

Compact and elegant

COMPACT AND AESTHETIC

The Brustor B-50 has a **compact and fully enclosed** cassette casing which excels not only aesthetically but also technically. The B-50 is available **up to 5,50 m** with a 3 m maximum projection. The awning can easily be mounted by simply hooking it into the face or ceiling fix brackets. With an easy adjustable nut the inclination can effortlessly be altered up to 45°.

Option:



remote control



LED



RAL



valance



heating

STANDARD COLOURS



Brustor White



R 8019 Brown



R 9001 Cream





Anodised




R 7016
Anthracite grey
(structured)

Others colours optional

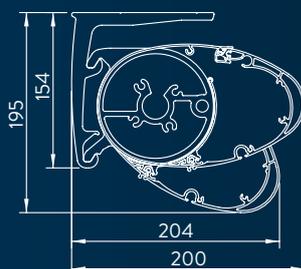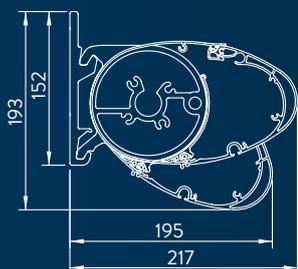

DIMENSIONS

Width	min. 2,05 m - max. 5,50 m
Projection	1,50 m - 2,00 m - 2,50 m - 3,00 m
Operation	motor (gear optional)
Cassette	15,2 cm high x 21,7 cm deep

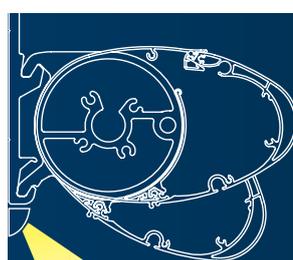

A robust and waterproof LED strip can be mounted on the wall, providing a powerful lighting system.




Ceiling fixation is available at no extra cost.



Fabric cover profile included as standard.

B-20, B-21 EN B-23

Budget friendly

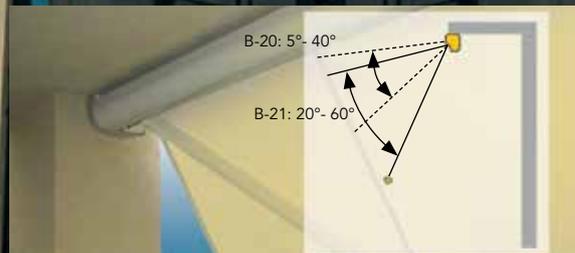

B-23




COMPACT AND FLEXIBLE


The semi-enclosed cassette awning B-20 with retractable arms for **ceiling installation** is available with an **inclination between 5° and 40°**. The almost similar B-21 can be mounted **between 20° and 60°**, the ideal solution for more privacy and extra shadow. Both awnings are available with a **maximum projection of 3 m** and a maximal width of 5,5 m. Because of its compact 13,5 cm height, the cassette of these awnings is extremely **suitable for fitting under a balcony**.

The B-23 is a semi enclosed cassette awning at an **interesting price**, with a maximum width of 6 m (with extra arm) and a maximum projection of 3 m. This awning is **very compact** and sticks to the wall. Mounting is easy and quick due to the supplied wall mounts. As standard the B-23 comes in white or cream.

STANDARD COLOURS



Other colours optional

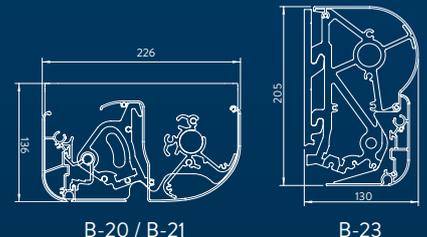


AFMETINGEN

Width	min. 2,05 m - max. 5,50 m
Projection	1,50 m - 2,00 m - 2,50 m - 3,00 m
Operation	motor (gear optional)
Cassette	22,5 cm high x 13,5 cm deep (B-21 and B-20)

WINDBLOCKER

Guarantees optimum privacy

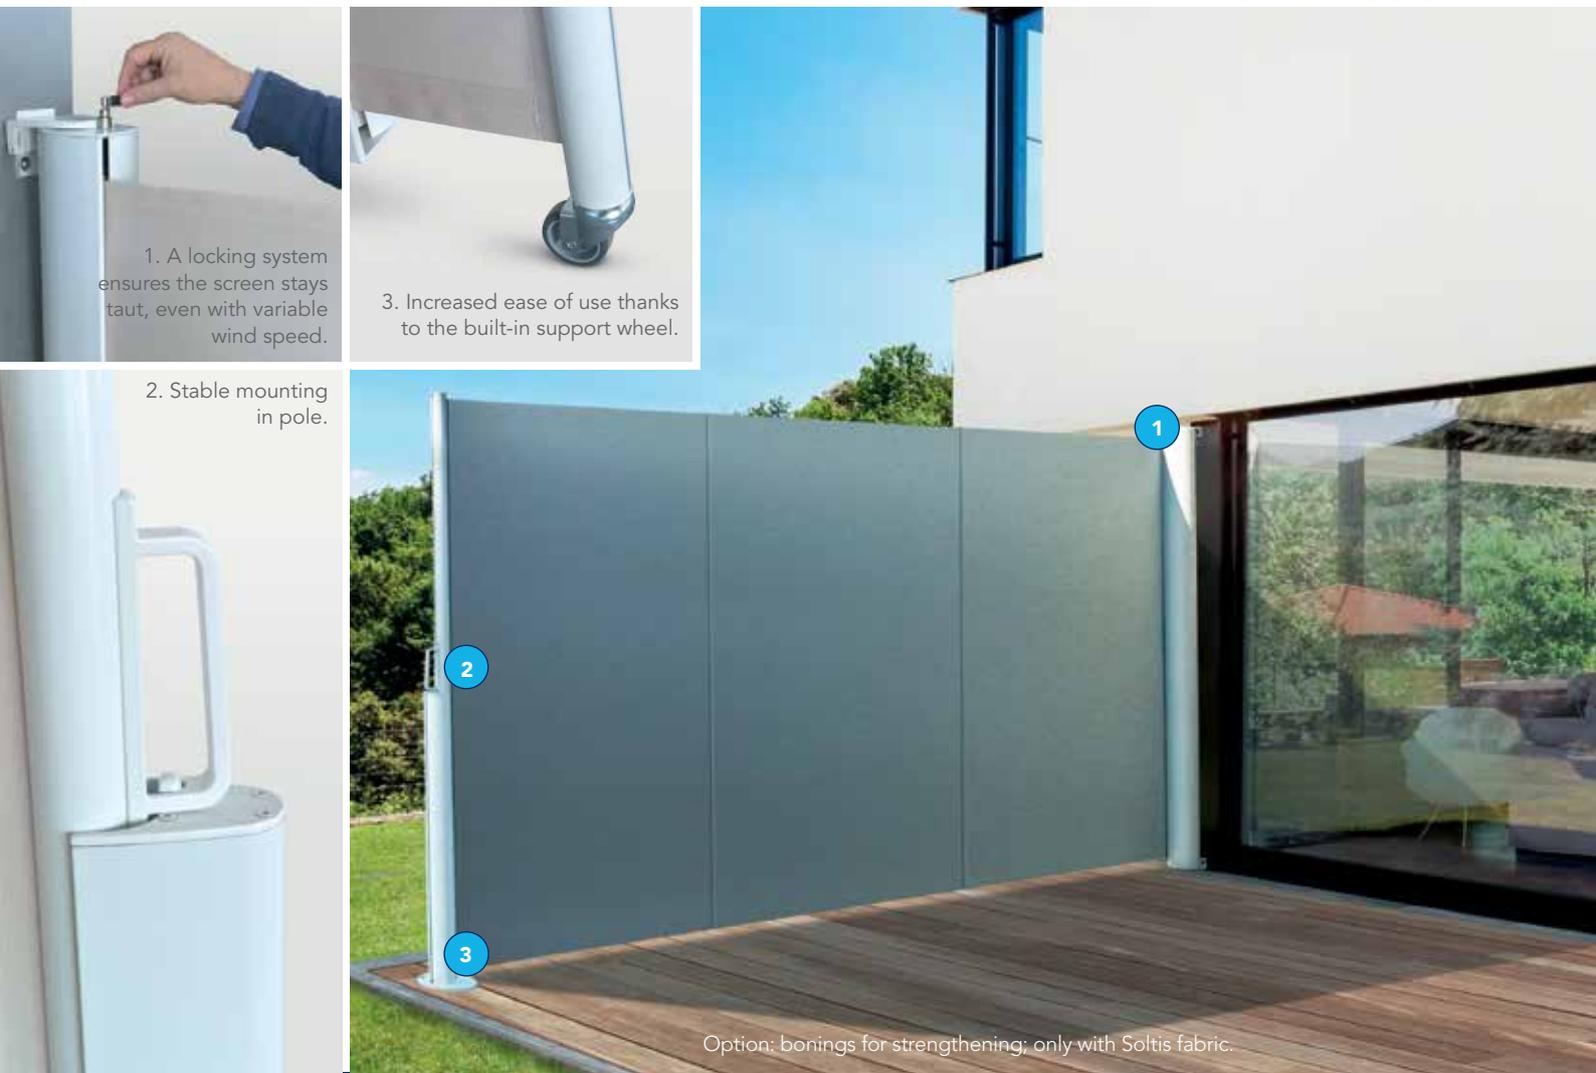

1. A locking system ensures the screen stays taut, even with variable wind speed.

3. Increased ease of use thanks to the built-in support wheel.

2. Stable mounting in pole.


Option: bonings for strengthening; only with Soltis fabric.

EXTRA PRIVACY

This horizontal tensioned blind is the **ideal solution for a windy terrace and to provide maximum privacy** in exposed locations. The Windblocker can also be used to provide angled shade. The height of the handle on the manually operated Brustor Windblocker can be at any position on the lead rail. The tensioned fabric can be fixed against a hook on the wall or on a pole. A high quality **heavy duty spring** ensures the fabric remains taut. The **stylish cassette casing** made from extruded powdercoated

The new pole encloses the lead rail and provides the Windblocker more stability.

STANDARD COLOURS



Other colours optional

DIMENSIONS

Width	Acrylic fabric: from 1,275 m to 2,00 m Soltis 86 fabric: from 1,275 to 1,86 m
Projection	2,00 m - 3,00 m - 4,00 m

B-126


Extendable shadow for your conservatory



ENJOY YOUR CONSERVATORY

The motorized B-126 is an awning with lateral guides for **conservatories, greenhouses and inclined glass roofs**. The lateral guide system offers an **extension** up to 1m25 over the front of your conservatory. The **specially designed cassette casing** prevents leaves and dirt from getting rolled up in the fabric. The conservatory awning B-126 provides shade **up to 5 m wide and 6 m projection** with a maximum fabric **surface area of 19 m²**. A **coupled version** creates shade up to 10 m wide with a maximum fabric surface area of 38 m² (acryl fabric) or 36 m² (Soltis fabric).

STANDARD COLOURS

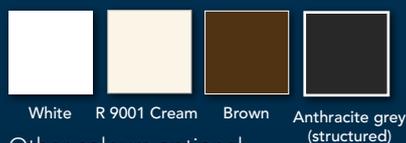

DIMENSIONS


	B-126 coupled	B-126
CONSERVATORY AWNINGS		
Max. width	from 5 m coupled (up to 10 m)	5 m
Max. projection	6 m	6 m
Motor	1X	1X
MAX. FABRIC SURFACE AREA		
Acryl	38 m ²	19 m ²
Soltis 86	38 m ²	19 m ²
Soltis 92	36 m ²	18 m ²

B-127 VERANDA

Flexible conservatory awning



The B-127 Veranda is also available with an extension up to 1,25 m, which provides additional frontal sun protection.

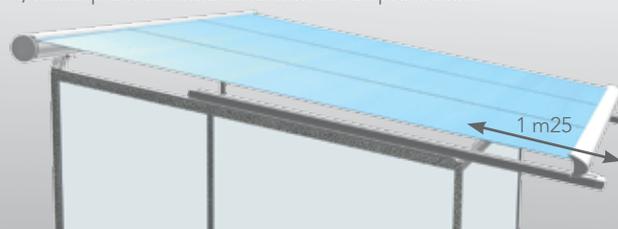

THE FLEXIBLE AWNING

The B-127 Veranda is a **flexible conservatory awning** system where the guides can be installed up to 1 m in from the edges of the conservatory. Thanks to the unique design of the B-127, conservatories with **bevelled corners** can be completely covered. The B-127 is also available with an **extension** up to 1,25 m over the front of the conservatory, which provides as an added benefit frontal sun protection. The **motorized** conservatory awning B-127 offers a maximum width of 6 m, projection of 5 m and fabric surface area of 22 m². The B-127 is also available under the reference B-127 Pergola (see page 28).

STANDARD COLOURS



Other colours optional

White R 9001 Cream R 8019 Brown Anthracite grey (structured)

DIMENSIONS

CONSERVATORY AWNINGS

Max. width	6 m
Max. projection	5 m
Motor	1X

MAX. FABRIC SURFACE AREA

Acryl	22 m ²
Soltis 86	19 m ²
Soltis 92	18 m ²

B-127 PERGOLA

The stand-alone solution

AWNING WITH SELF-SUPPORTING STRUCTURE

The B-127 Pergola is a complete pergola system with **front support poles and wall fixation**. The B-127 Pergola comes standard with a motor and **remote control**. With a maximum **width of 6 m and a projection of 5 m**, a **shadow surface up to 22 m²** can be created.

Standard:



remote control

Option:



LED

STANDARD COLOURS



White



R 9001 Cream



R 8019 Brown



Anthracite grey
(structured)

Other colours optional


DIMENSIONS

PERGOLA

Max. height support poles	2,25 m
Max. width	6 m (Soltis 4,8 m)
Max. projection	5 m

MAX. FABRIC SURFACE AREA

Acryl	22 m ²
Soltis 86	19 m ²
Soltis 92	18 m ²

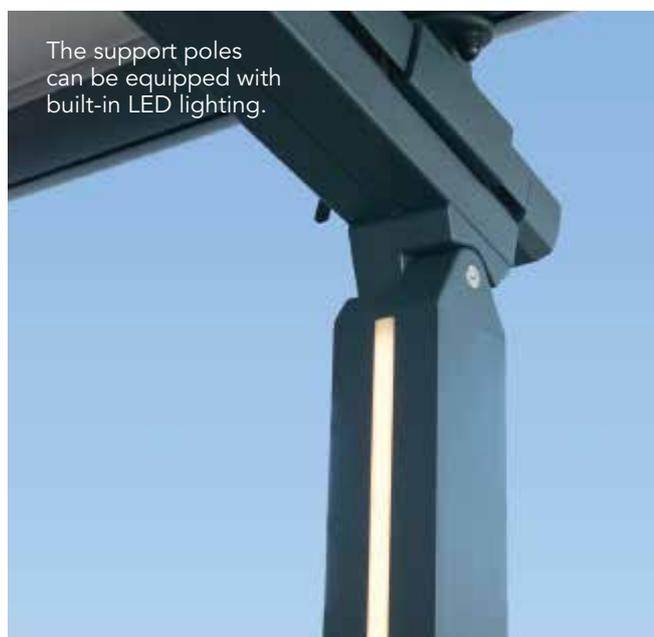

The support poles can be equipped with built-in LED lighting.



Fabric tension can be optimized with the latch (now standard delivered).



A new elegant and robust casting connects the transition from the vertical to the horizontal carrier seamlessly.

BRUSTOR®

ZIPSCREEN

Windproof awning



WINDPROOF CONDUCTION IN THE PROFILE

The ZIP Screen is windproof thanks to its ingenious zip on the edge of the fabric which locks it within the pvc extrusion within the side guide. The ZIP Screen has a unique front cover to the side guide that snaps closed and hides all fixings.




Round cassette

Square cassette



New system for a better tension of the fabric.



For all standard and ZIP screens, the rolling axis can be removed from the cassette very easily without having to demount the screen.

ZIP SCREEN FEATURES

The B-1085, B-1100 and B-1350 ZIP are **extremely windproof screens** and at the same time act as an **insect repellent**. The **unique zip system** keeps the fabric locked in the side guides at every position. The ZIP Screen passes the **highest wind speed classification** (wind class 3) and is available with a **round or square cassette**, depending on the height of the screen. The maximum dimensions for the ZIP Screen are 6m wide and 6 m high, with a maximum surface area of 18m². The ZIP Screen is also available in a **coupled version**.

Option:



remote control



RAL

STANDARD COLOURS



Bruster White



R 8019 Brown



R 9001 Cream



Anodised



R 7016
Anthracite grey

Other colours optional

DIMENSIONS

	B-1085 SR/C ZIP	B-1100 SR/C ZIP	B-1350 C ZIP
Fabric	Screen fabric (Sergé 600) - Soltis 86 - Soltis 92 - Soltis B92 (100% blackout)		
Max. height	max. 1,8 m	max. 3,5 m	max. 6,0 m
Min. - Max. width	0,75 - 3,6 m	0,75 - 4,0 m	0,9 - 6,0 m
Max. width coupled	1,2 - 7,2 m	1,2 - 7,2 m	impossible
Max. surface/ coupled	6,5 m ² /13 m ²	14 m ² / 25,2 m ²	18 m ² / ---
Dimensions cassette	8,5 cm x 8,5 cm	10,5 cm x 10,5 cm	13,5 cm x 13,5 cm
Wind resistance	3	3	3
Operation	motor / gear*	motor / gear*	motor

* With some limited dimensions the motor can be replaced by gear.

SCREEN STANDARD

Vertical screens



GUARANTEED PRIVACY INSIDE

The vertical screens B-1085 and the B-1100 are in a **compact and elegant casing**, depending on the height of the window. The Brustor screen is **easy to install** on every window of the façade and provides shade up to 4 m high and 4 m wide (coupled: 7,2 m wide). The maximum height of the screen is 4 m. Thanks to a **small, discrete box**, match the Brustor screens perfectly on every facade. The B-1085 and B-1100 screens are available in **5 standard colours**, but can be produced in **any RAL colour**. They can be operated with a **gear box** and crank handle or an **integrated motor**. In addition to the default screen, there is also a built-in version available.

Option:



remote control



RAL

STANDARD COLOURS



Brustor White



R 8019 Brown



R 9001 Cream



Anodised



R 7016
Anthracite grey
(textured)

Other colours optional

DIMENSIONS

	B-1085 SR/C STD	B-1100 SR/C STD
Fabric	Screen fabric (Sergé 600) - Soltis 86 - Soltis 92 - Soltis B92 (100% blackout)	
Max. height	max. 3,5 m	max. 4,0 m
Min. - Max. width	0,6 m - 3,6 m	0,6 m - 4,0 m
Max. width coupled	1,2 m - 7,2 m	1,2 m - 7,2 m
Max. surface / coupled	8 m ² / 16 m ²	8 m ² / 16 m ²
Dimensions cassette	8,5 cm x 8,5 cm	11 cm x 11 cm
Wind resistance	2	2
Operation	motor / gear*	motor / gear*

* With some limited dimensions the motor can be replaced by gear

CABLE SCREEN

Stylish & functional



INDOOR SCREEN

Indoor sun protection



STYLISH & FUNCTIONAL

This **budget friendly** screen has a rust-proof steel lead rail which is guided down by **stainless steel side cables**. This aesthetically pleasing screen **can be used inside as well as outside**.



Option:



remote control



RAL

DIMENSIONS

Fabric	Screen fabric (Sergé 600) - Soltis 86 & 92 - Soltis B92 (100% blackout)
Max. height	max. 2,00 m
Width	0,60 m - 4,00 m
Width coupled	impossible
Max. fabric surface	± 8 m ²
Cassette dimensions	10,5 x 10,5 cm
Wind resistance	CE wind class 2
Operation	motor / gear*

THE DISCRETE SCREEN

If a screen can't be mounted outside, an Indoor Screen can provide a maximum possible protection against solar heat and harsh light levels. Even equipped with a motor, they will remain **discrete and stylish**. They're also available with **remote control or gear**.

Option:



remote control



RAL

DIMENSIONS

Fabric	Screen fabric (Sergé 600) - Soltis 86 & 92 - Soltis B92 (100% blackout)
Max. height	max. 6,00 m
Width	0,60 m - 4,00 m
Width coupled	impossible
Max. fabric surface	18 m ²
Cassette dimensions	-
Wind resistance	-
Operation	motor / gear*

* With some limited dimensions the motor can be replaced by gear.

TOPSCREEN

For horizontal or inclined glass structures



WINDPROOF AND ANTI-INSECT SCREEN

The TOP Screen is a windproof and **anti-insect** screen which covers **skylights and other horizontal or inclined glass roof structures, compact porches and greenhouses**. The combination of ZIP Screen and cable and tension spring system ensures the fabric stays under **perfect tension at every position**, even at a wind force of 6 Beaufort. TOP Screen meets the highest European standard of wind resistance (wind class 3 - EN 13561). The screen can be equipped with both dimout and blackout fabrics. Fully darkening possible with Soltis B92.

Option:



remote control



RAL

STANDARD COLOURS



White



R 8019 Brown



R 9001 Cream



R 7016
Anthracite grey
(textured)

Other colours optional

DIMENSIONS

Fabric	Soltis 86, Soltis 92, Soltis B92 (100% blackout)
Width	up to 3 m
Height / projection	up to 3 m
Inclination	from 0° to 90°
Operation	motor with switch
Cassette	11 cm x 11 cm

* Projection and width of 3,00m : standard delivered with 6 spacing profiles per guides (= height of 6 cm).

B-2100 DROP ARM AWNING

Stormproof



STORMPROOF

The Brustor B-2100 is a **drop arm awning with stormproof side arms**. The fabric is protected in an extruded aluminium, powdercoated, full cassette casing. Thanks to the **heavy duty springs** in the arms, the fabric stays taut at every position. The B-2100 awning can drop up to 90° or 135°. The maximum **width is 5 m for a single unit and 6 m for a coupled one**. The standard motor can be replaced by an **optional gear**.

Option:



remote control



RAL

STANDARD COLOURS



White R 8019 Brown R 9001 Cream

Other colours optional



DIMENSIONS

Fabric	Screen - Soltis - Acryl
Width	0,65 m - 5,00 m (coupled up to 6,00 m)
Projection	0,80 m - 1,00 m - 1,20 m - 1,40 m (depending on width and fabric)
Inclination	up to 90° or 135°
Operation	motor (gear optional)
Cassette	12,8 cm x 13,2 cm

BRUSTOR®

OUTDOOR SUN SYSTEMS



DIM&S 140339

Brustor nv
Muizelstraat 20 - 8560 Gullegem - BELGIUM
Tel.: +32 56 53 18 53 - Fax: +32 56 53 18 20
info@brustor.com - www.brustor.com



YOUR BRUSTOR DEALER:

A large white rectangular area intended for the user to write the name of their Brustor dealer.